

Overview of elements 2025



Ordering Information | Dimensional drawings

Ordering correctly

Necessary Order Information

Complete and accurate data is absolutely necessary for the processing and production of your order, since an accurate and clear order allows us to immediately begin processing your order without time-consuming enquiries.

For this reason, your order must contain the following information:


- · Range name and front number
- Handle number
- · Drill pattern number
- · Carcase colour number
- Plinth height and colour

(if not specified, the standard plinth height of 150 mm will be supplied)

- · Worktop design / décor
- · Worktop edge design / edge colour
- Worktop sketch with dimensions and indication of tongue and groove joints
- Design of the worktop outer corner (for APD): square or round
- Upright / top shelf design including the colour number and upright thickness / Upright panel floor seal colour
- Shelf colours
- · Glass design and / or colour
- · Roll-up front colour
- Cornice profile / light pelmet profile including colour for each
- Order number and / or abbreviation
- Manufacturer information and built-in appliance model identification
- Kitchen block number (for kitchen block orders)
- Layout sketch with dimension information in 1:20 ratio
- Please draw / write any special productions in the centre of the layout sketch

Dimensional drawings for upright panels

Uprights at end of run for base units, sideboards and tall units are supplied as standard with an upright panel shoe. The upright panel shoe is included in the price of the upright panel and is available in: 014 Stainless steel appearance, 010 Black. If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.



The height of the upright panel is reduced by the interior height dimensions of the profile and thus calculated as follows:

carcase height

- + plinth height
- 8 mm interior chamfering of the floor profile
- = material height

Base units

Carcase depth: 561 mm Carcase height: 720 mm

70, 100, 150 or 200 mm Plinth height:

Base units



Base unit

1 continuous door. 1 shelf

UD 20/30/40/45/50/60 cm



Base unit

1 pinned door. 1 shelf

U 20/30/40/45/50/60 cm



Base unit

2 continuous doors. 1 shelf

UD 80/90/100/120 cm



Base unit

2 pinned doors, 1 shelf

U 80/90/100/120 cm



Base unit

- 1 drawer 1 door
- 1 shelf

US 30/40/45/50/60 cm



Rase unit

- 2 drawers. 2 doors,
- 1 shelf

US 80/90/100/120 cm



Base unit

- 1 drawer, 2 doors,
- 1 shelf

USG 80/90/100/120 cm



Pull-out unit

2 pull-outs. 1 internal drawer

UI2DA 30/40/45/50/60/80/90/100/120 cm



Pull-out unit 1 drawer.

2 pull-outs

UA 30/40/45/50/60/80/90/100/120 cm



Pull-out unit 2 drawers,

1 pull-out

UD2SA 50/60/80/90/100/120 cm



Drawer unit 3 drawers,

1 pull-out

U3SA 30/40/45/50/60/80/90/100/120 cm

Base units



Pull-out unit

1 pull-out, continuous front, 2 metal boxes with non-slip mats

UAMD 20/30 cm



Open shelf base unit

2 fixed shelves. side depth: 582 mm

UR 15/20/30/40/45/50/60 cm

Corner base units



Corner base unit

2 continuous doors. opening angle: 165°, 1 shelf

UDTE 80/90 cm



Corner base unit

2 pinned doors, opening angle: 165°, 1 shelf

UTE 80/90 cm



Corner base unit as carousel unit

2 continuous fronts, carcase height: 750 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



Corner base unit as carousel unit

2 pinned fronts. carcase height: 750 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



Chamfered corner base unit

1 continuous door, 1 shelf

UED 80/90 cm



Chamfered corner base unit

1 pinned door, 1 shelf

UE 80/90 cm

Half corner base units



UED90-40 UED90-45 UED100-50 UED100-60

Corner base unit

- 1 continuous door 1 shelf,
- 1 angle filler
- Carcase widths: 900, 1000 mm Planning dimensions (variable):
- 650 (630 750) x ... *90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm
- *100-50: ... 1150 (1130 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UE90-40 UE90-45 UE100-50

UE100-60

Corner base unit 1 drawer.

- 1 door, 1 shelf
- 1 angle filler
- Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ..
- *90-40: ... 1050 (1030 1150) mm *90-45: ... 1100 (1080 - 1200) mm
- *100-50: ... 1150 (1130 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UEDSA90-45 UEDSA100-50 **UEDSA100-60**

Corner unit with swivel pull-out 1 continuous door.

- 2 tablar shelves with metal railing, height adjustable, 1 angle filler
- Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ..
- *90-45: ... 1100 (1080 1200) mm *100-50: ... 1150 (1130 - 1250) mm
- *100-60: ... 1250 (1230 1350) mm




UESA90-45 UESA100-50

UESA100-60

Corner unit with swivel pull-out

- 1 drawer, 1 door,
- 2 wooden swivel tablars with metal railing, height adjustable,
- 1 angle filler Carcase widths: 900, 1000 mm
- Planning dimensions (variable): 650 (630 750) x ... *90-45: ... 1100 (1080 1200) mm





UESAV90-45 UESAV100-50 UESAV100-60

Corner unit with swivel pull-out

- 1 pinned door, 2 tablar shelves with metal railing, height adjustable,
- 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ..
- *90-45: ... 1100 (1080 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



Surcharge for recessed fillers


on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly. carcase depth: 561 mm

Base units

Carcase depth: 561 mm Carcase height: 720 mm

70, 100, 150 oder 200 mm Plinth height:

Angle fillers



Angle filler

Continuous front material, 70 x 70 mm, planning dimensions: 650 x 650 mm

as above, however variable from 50 to 170 mm, planning dimensions: 630 - 750 mm 1st dimension = left / 2nd dimension = right



Surcharge for recessed fillers

on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm

Fillers / Panelling



Filler

Carcase material, 720 mm high, U-shaped seal for connection to wall, width: 100 / 200 mm

UPK 10/20 cm



Front filler

Continuous front material, width: 200 mm





RKS-72

Base unit back panel

16 mm thick, 720 mm high, width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1.

Vario clip fastening, in case of reproduction finishes vertical wood grain



as above, however, continuous height.

including floor profile: 70 mm plinth height: 810 mm 100 mm plinth height: 840 mm 150 mm plinth height: 890 mm 200 mm plinth height:

Available floor profile colours:

010 Black 014 Stainless steel appearance

940 mm



30/40/45/50/60/80/90 cm

Base unit back panel

1 continuous front design, 720 mm high, Vario clip fastening, without drill hole

Cooker housing



Cooker housing

1 fixed panel, side sections: 202 mm deep, aperture dimension: 591 mm

HU 60 cm



Cooker housing

1 fixed panel, aperture dimension: 598 mm

HUB 60 cm



Cooker housing

1 plastic drawer. 16 I capacity, interior dimensions: 485 x 480 x 68 mm, aperture dimension: 598 mm



Cooker housing

1 large-capacity drawer with second level for baking trays, plastic, 30 I capacity, interior dimensions: 480 x 380 x 150 mm. aperture dimension: 598 mm

Hot plate units



Hot plate unit

1 internal panel, 1 construction shelf for heat insulation. 1 door

1 shelf



Hot plate unit

1 fixed panel, 1 construction shelf for heat insulation. 1 door.

1 shelf



Hot plate unit

1 drawer,

1 spacer shelf for hot plate, 1 door,

1 shelf



Hot plate unit

1 drawer,

1 spacer shelf for hot plate, 2 pull-outs

KS2A 60/80/90/100/120 cm



60/80/90/100/120 cm

Hot plate unit

1 internal panel, 1 construction shelf for heat insulation,

2 pull-outs

Sink units



Sink base unit

1 internal panel, 1 continuous door

SPUD 40/45/50/60 cm



Sink base unit

1 fixed panel, 1 door

SPU 40/45/50/60 cm



Sink base unit

2 internal panels, 2 continuous doors

SPUD 80/90/100/120 cm



Sink base unit

2 fixed panels, 2 doors

SPU 80/90/100/120 cm



SPUAD 40/45/50/60 cm

Sink base unit 1 internal panel.

1 continuous front with centred handle, without pull-out rails and drill holes



Sink base unit

1 fixed panel. 1 front with centred handle, without pull-out rails and drill holes

SPUA 40/45/50/60 cm



SPUDA-ASK

45/50/60 cm



Sink base unit Separato-K

1 internal panel, 1 pull-out, 500 mm deep, with waste separation system Separato-K

with pull-out lid, 1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers.

1 bio lid (for all widths)

Doors for integrated appliances



Door

for integrated dishwashers. without handle

GSB 45/60 cm



Continuous door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs



Pinned door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs



573

Base units in XL height

Carcase depth: 561 mm Carcase height: 792 mm

70, 100, 150 or 200 mm Plinth height:

XL Base units



XL Base unit

1 continuous door 2 shelves

UD*-X 20/30/40/45/50/60 cm



XL Base unit

1 pinned door. 2 shelves

U*-X 20/30/40/45/50/60 cm



XL Base unit

2 continuous doors. 2 shelves

UD*-X 80/90/100/120 cm



XL Base unit

2 pinned doors. 2 shelves

U*-X 80/90/100/120 cm



XL Base unit

1 drawer 1 door

1 shelf

US*-X 30/40/45/50/60 cm



XI Base unit

2 drawers. 2 doors,

1 shelf

US*-X 80/90/100/120 cm



XL Base unit

1 drawer,

2 doors

1 shelf

USG*-X 80/90/100/120 cm



Pull-out unit

2 pull-outs, 1 internal drawer

UI2DA*-X 30/40/45/50/60/80/90/100/120



XL Pull-out unit

1 drawer

2 pull-outs

UA*-X 30/40/45/50/60/80/90/100/120 cm



Pull-out unit 2 drawers.

1 pull-out

UD2SA*-X 80/90/100/120 cm cm



XL Drawer unit 3 drawers,

1 pull-out

U3SA*-X 30/40/45/50/60/80/90/100/120 cm

XL Base units



XL Pull-out unit

1 pull-out, continuous front. 2 metal boxes with non-slip mats

UAMD*-X 20/30 cm



XL Open shelf base unit

2 fixed shelves. side depth: 582 mm

UR*-X 15/20/30/40/45/50/60 cm

XL Corner base units



XI. Corner base unit 2 continuous doors, opening angle: 165°, 2 shelves



XL Corner base unit

2 pinned doors. opening angle: 165°. 2 shelves

UTE*-X 80/90 cm



XI. Corner base unit as carousel unit

2 continuous fronts, Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



XL Corner base unit as carousel unit

2 pinned fronts, Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



XL Chamfered corner base unit

1 continuous door. 2 shelves

UED*-X 80/90 cm



XL Chamfered corner base unit

1 pinned door, 2 shelves

UE*-X 80/90 cm

XL Half-corner units



UED90-40-X UED90-45-X UED100-50-X UED100-60-X

XL Corner base unit

1 continuous door 2 shelves,

1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable):

650 (630 - 750) x ... *90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm

*100-60: ... 1250 (1230 - 1350) mm



UE90-40-X

UE90-45-X UE100-50-X UF100-60-X

XL Corner base unit

1 drawer

1 door

1 shelf,

1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

*90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1230 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UEDSA90-45-X UEDSA100-50-X UEDSA100-60-X

XL Corner unit with swivel pull-out

1 continuous door, 2 wooden swivel tablars with metal railing height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



645 UESA90-45-X UESA100-50-X UESA100-60-X

swivel pull-out

1 drawer.

1 door, 2 wooden swivel tablars with metal railing, height adjustable.

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ...

1 angle filler

*90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



UESAV100-50-X

UESAV100-60-X

XL Corner unit with swivel pull-out

1 pinned door, 2 wooden swivel tablars

with metal railing, height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm

*100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm



Surcharge for recessed fillers


on fillers and half corner units, side panel made of carcase material. in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm

Base units in XL height

Carcase depth: 561 mm Carcase height: 792 mm

70, 100, 150 or 200 mm Plinth height:

XL Angle fillers



UPE-V-X

XL Angle filler

Continuous front material, 70 x 70 mm, Planning dimensions: 650 x 650 mm

as above however variable from 50 to 170 mm, Planning dimensions: 630 - 750 mm 1st dimension = left 2nd dimension = right



Surcharge for recessed fillers

on fillers and half corner units, side panel made of carcase material. in carcase height incl. 2 plinth feet for on-site assembly. carcase depth: 561 mm

XL Fillers / Panelling



XL Filler

Carcase material. 792 mm high, U-shaped seal for connection to wall, width: 100 / 200 mm

UPK*-X 10/20 cm



XL Front filler

Continuous front material. width: 200 mm

UPD*-X 20 cm



XL Base unit back panel

16 mm thick 792 mm high width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1,

Vario clip fastening, in case of reproduction finishes vertical wood grain



as above, however, continuous height, including floor profile:

70 mm plinth height: 882 mm 100 mm plinth height: 912 mm 150 mm plinth height:

962 mm 200 mm plinth height: 1012 mm

Available floor profile colours: 010 Black

014 Stainless steel appearance



XL Base unit back panel

1 continuous front, 789 mm high, Vario clip fastening, without drill holes

XL Cooker housings



XL Cooker housing

1 fixed panel. aperture dimension: 595 mm



XL Cooker housing

1 plastic drawer, 16 I capacity, interior dimensions: 485 x 480 x 68 mm aperture dimension: 595 mm



XL Cooker housing

1 large-capacity drawer with second level for baking trays, plastic, 30 I capacity, interior dimensions: 480 x 380 x 150 mm. aperture dimension: 595 mm

XL Hot plate units



XL Hot plate unit

1 internal panel, 1 construction shelf for heat insulation

1 door,

2 shelves



XL Hot plate unit

1 fixed panel, 1 construction shelf for heat insulation

1 door.

1 shelf



XL Hot plate unit

1 drawer 1 spacer shelf for hot plate, 1 door,

1 shelf



XL Hot plate unit

1 drawer,

1 spacer shelf for hot plate, 2 pull-outs

KS2A*-X 60/80/90/100/120 cm



XL Hot plate unit 1 internal panel, 1 construction shelf

for heat insulation, 2 pull-outs

KD2A*-X 60/80/90/100/120 cm

XL-Doors for integrated appliances



GSBD*-I-X 45/60 cm

Continuous XL door for fully integrated dishwashers, built-under fridge and freezer units with pull-outs, includes spacer strip



GSB*-I-X 45/60 cm

Pinned XL door for fully integrated dishwashers, built-under fridge and freezer units with null-outs includes spacer strip

XL Sink base units



XL Sink base unit

1 internal panel, 1 continuous door

SPUD*-X 40/45/50/60 cm



XL Sink base unit

1 fixed panel, 1 door

SPU*-X 40/45/50/60 cm



XL Sink base unit

2 internal panels. 2 continuous doors

SPUD*-X 80/90/100/120 cm



XL Sink base unit

2 fixed panels, 2 doors

SPU*-X 80/90/100/120 cm



40/45/50/60 cm


XL Sink base unit

1 internal panel 1 continuous front with centred handle, without pull-out rails and drill holes



XL Sink base unit

1 fixed panel, 1 front with centred handle, without pull-out rails and drill holes





XL Sink unit Separato-K 1 internal panel,

1 pull-out, 500 mm deep, with waste separation system Separato-K with pull-out lid,

1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser. 600 mm width: with 2 side organisers, 1 bio lid (for all widths)



6

Worktops | Niche cladding

Worktops



APN 60/70/80/90/100/ 110/120 cm

Worktop APN with N-edge

rounded front edge, sides sealed with straight décor edge. Price per running 100 mm, every 100 mm started will

be invoiced. Max. length:

Décor group 1: 5100 mm. Décor group 2 (Xtra décors): 4000 mm Please quote the décor number in your order.



60/70/80/90/100/ 110/117 cm

Worktop APD with décor edge

front and side edges coated with straight décor edging material, 1.5 mm thick. Price per running 100 mm, every 100 mm started will be invoiced.

Max. length:

Décor group 1: 5100 mm, Décor group 2 (Xtra décors): 4000 mm Please quote the décor and edge colour number in your

Worktop processing



Surcharge for exterior and interior roundings deviating from the standard radii

AP-R



APN-A APN-AS APD-A

Surcharge for chamfered

on worktops and tables, including edging



AP-NF

Tongue and groove joint for worktop corners or extensions, incl. screw fittings. tongues and water resistant

glue

o. Abb.

Cut-outs for built in hobs, sinks or ventilation grills

AP-AUS



Surcharge for inner corners in square design on worktops and tables with décor edge

AP-IEK

Niche cladding



NV 54 **NV 70**

Niche cladding coated on both faces, 16 mm thick, horizontal structure (except 274 Teramo marble reproduction) with edge on all sides, width: 250 - 2580 mm heights:

NV54 for niches beneath wall units NV70 for niches beneath cooker hoods

Price per started 100 mm.

NV 203

Niche cladding as above, however with deviating dimensions acc. to sketch max. 2580 mm wide, 2030 mm high, 1st dimension in direction of grain coated edge all round. Minimum price: 0.5 m², minimum dimensions: 250 x 200 mm,

invoiced per m2.

Accessories for niche cladding



NPUK 500

Plastic cover profile in translucent appearance for niche or back panel cladding, 16 mm thick, self-adhesive, 5000 mm long



WAPN 200/400/500 cm

Upstands for continuous planning with niche cladding

2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep, delivered as strand material.

Available in:

014 Stainless steel appearance, 010 Black



WAPN-Z

WAPN accessory bag matches the plastic

upstands WAPN consisting of: 4 x interior corner 90° /

2 x interior corner 135° 2 x exterior corner 90° 2 x set of end caps for

WAPN

2 x set of end caps for niche cladding

Available in:

014 Stainless steel appearance, 010 Black



NKPU 200 / 400

Niche profile on bottom Aluminium profile, 2-piece with sealing profile for niche and back panel

cladding or as upstand, dimensions: 17 mm high, 20 mm deep

Available in:

014 Stainless steel appearance, 010 Black



NKPO 200 / 400

Niche profile on top aluminium profile, stainless steel appearance for niche cladding incl. 1 set of end caps (left / right), dimensions: 16 mm high, 16 mm deep



NKP accessory bag matches upstand NKPU Available in:

014 Stainless steel appearance, 010 Black



1 set of end caps matching aluminium profile for niche cladding NKPO

NKP-EK

Upright panels | Top shelves | Wall shelf units

Upright panels for base units



Upright at end of run incl. floor profile in 014 Stainless steel appearance or 010 Black, depth: 583 mm

Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm



Upright for room designs depth: 250 to 1166 mm, edged on both sides, incl. floor profile in 014 Stainless steel appearance or 010 Black

Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm

XL Upright panels for base units



XL Upright at end of run incl. floor seal in 014 Stainless steel appearance or 010 Black, depth: 583 mm

UWA*-X 10/16/25/50 mm

Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm



UWR*-X 10/16/25/50 mm

XL Upright for room designs depth: 250 to 1166 mm, edged on both sides, incl. floor seal in 014 Stainless steel appearance or 010 Black

Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm

Wall shelf units



WB25 30/40/45/50/55/ 60/65/70/80/90/ 100/110/120 cm

Plug-in wall shelf, 25 mm thick Carcase material, polymer edging all around,

255 mm deep, incl. metal plug fitting



VB16 100 cm

Wall shelf unit with shelf holders, 16 mm thick 255 mm deen polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VRH5

VB16 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm. includes 4 shelf holders VBH5

Available shelf holder colours. 010 Black 014 Stainless steel appearance

Top shelves



Upright at end of run / intermediate upright for wall units. height 360 mm depth: 372 mm, height: 360 mm

Upright panels for wall units

WW 10/16/25/50 mm -36



Upright at end of run / intermediate upright for wall units. height 576 mm depth: 372 mm, height: 576 mm

WW 10/16/25/50 mm -58



Upright at end of run / intermediate upright for wall units, height 1 depth: 372 mm, height: 720 mm

WW 10/16/25/50 mm -1



Upright at end of run / intermediate upright for wall units, height 2 depth: 372 mm, height: 792 mm

WW 10/16/25/50 mm -2



Upright at end of run / intermediate upright for wall units, height 3 depth: 372 mm, height: 864 mm

WW 10/16/25/50 mm -3

Top shelf, ADB10 38/59/117 cm

10 mm thick. for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm



for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm

Top shelf,

Top shelf,

16 mm thick.



25 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides. length: 250 - 2580 mm



Top shelf, 50 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides. length: 250 - 2580 mm



Wall shelf unit with shelf holders, 25 mm thick 255 mm deep, polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VBH5

VB25 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm. includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel appearance



VB50 100 cm

Wall shelf unit with shelf holders, 50 mm thick 255 mm deep, polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VBH5

VB50 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm. includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel appearance

Highboards - 1582 / 1612 / 1662 / 1712 mm high

Carcase depth: 561 mm Carcase height: 1512 mm

70, 100, 150 oder 200 mm Plinth height:

XL Highboards – 1654 / 1684 / 1734 / 1784 mm high

XL Highboards

Carcase depth: 561 mm Carcase height: 1584 mm

70, 100, 150 oder 200 mm Plinth height:



Highboards



Highboard

- 2 doors, 1 fixed shelf,
- 3 shelves

Housing for ovens



XL Highboard

- 2 doors,
- 1 fixed shelf, 3 shelves



XL Housing for ovens



Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 1 drawer
- 1 pinned door,
- 1 shelf



XL Oven housing aperture height: 590 mm 1 fixed compensation panel,

- 1 drawer.
- 1 door,
- 2 shelves

Integrated appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 1 appliance door,
- 2 pull-outs

XL Integrated appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm 1 appliance door,

2 pull-outs

Integrated appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 internal panel,
- 1 appliance door,
- 1 drawer

XL Integrated appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 internal panel,
- 1 appliance door,
- 1 pull-out

Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 internal panel,
- 2 appliance doors

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm 2 appliance doors

G145-X

Fillers



Filler Carcase material, 1512 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK 20 cm




XL Fillers


XL Filler Carcase material, 1584 mm high, U-shaped seal for connection to wall, width: 230 mm


Tall units, height 1 – 2086 / 2116 / 2166 / 2216 mm high Carcase depth: 561 mm 2016 mm Carcase height: 70, 100, 150 oder 200 mm Plinth height: Tall units Pantry unit 501















Appliance housing for ovens, microwaves, steam cookers, compact appliances








Oven housing

GOS-1












Appliance housings with aperture height up to 880 mm

Appliance housing



Appliance housings with aperture height up to 1230 mm





Tall units, height 1 - 2086 / 2116 / 2166 / 2216 mm high


Carcase depth: 561 mm

Carcase height: 2016 mm
Plinth height: 70, 100, 150 oder 200 mm Plinth height:

Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer aperture height: 1450 mm 1 appliance door for freezer compartment, 1 appliance door for fridge section, 1 pull-out




Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-1

Fillers / Cladding




HPD20-1

20 cm

Filler Carcase material, 2016 mm high, U-shaped seal for connection to wall, width: 230 mm

Front filler



Continuous front material,



Tall units in XL height, height 1 XL - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm 2088 mm Carcase height:

70, 100, 150 oder 200 mm Plinth height:

XL Tall units



XL Pantry unit

- 3 doors, 2 fixed shelves,
- 4 shelves

H*-1X 30/40/50/60 cm



XL Pantry unit

- 2 doors,
- 1 fixed shelf,
- 5 shelves

HDV*-1X 30/40/50/60 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro. 6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-1X 30/40 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1X 30/40 cm



XL Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials,
- HB*-1X 40/50/60 cm
- 1 system shelf,
- 1 hose rack for vacuum
- cleaner.
- 2 pegboards

<u>501</u> 933

XL Tall unit

- 1 door.
- 1 fixed shelf.
- 1 shelf,
- 1 lug connected door,
- 5 internal pull-outs

HI*-1X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel,
- 3 shelves

GO-1X



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel,
- 1 drawer,
- 2 shelves

GOS-1X



XL Oven housing aperture height: 590 mm

- 1 shelf,
- 1 fixed compensation panel,
- 1 drawer,
- 2 pull-outs

GOS2A-1X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 2 doors.

- 1 fixed compensation panel,
- 1 shelf

GMO-1X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door, 1 shelf.
- 1 fixed compensation panel,
- 1 pull-out

GMOA-1X



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 flap,
- 1 lifting door,
- 1 fixed compensation panel,
 - 1 door
 - 1 shelf



XL Appliance housing for oven and microwave with lifting door

aperture height: 370 mm aperture height: 590 mm

- 1 flap.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors
- 1 appliance door,
- 2 shelves

G88-1X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 appliance door,
- 1 door. 2 shelves

GD88-1X

501



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 door. 1 shelf,
- 1 appliance door,
- 2 pull-outs

G88A-1X

XL Appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 appliance door,
- 1 door
- 1 shelf

G123-1X

G123A-1X



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 internal panel,
- 1 appliance door, 1 pull-out



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door
- 1 shelf,
- 1 internal panel, 1 appliance door for
- freezer compartment, 1 appliance door for
- fridge section

Tall units in XL height, height 1 XL - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm

Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel, 2 appliance doors

G145-1X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm 1 appliance door for freezer compartment, 1 appliance door for

G145A-1X

fridge section, 1 pull-out

XL Fillers / Cladding



XL Filler Carcase material, 2088 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-1X 20 cm



XL Front filler Continuous front material, width: 200 mm

HPD20-1X 20 cm

XL Appliance housings with aperture height between 1580 - 1940 mm




XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-1X







Tall units, height 2 – 2158 / 2188 / 2238 / 2288 mm high Carcase depth: 561 mm 2088 mm Carcase height: 70, 100, 150 oder 200 mm Plinth height: Tall units





closing SoftStoppPro,








Appliance housing for ovens, microwaves, steam cookers, compact appliances















Appliance housings with aperture height up to 880 mm

573

Appliance housing

for integrated fridge



Appliance housings





aperture height: 1230 mm 1 door, 1 shelf.

1 internal panel 1 appliance door, 1 pull-out



Appliance housing for integrated fridge / freezer aperture height: 1230 mm

1 door, 1 shelf,

1 internal panel, 1 appliance door for

freezer compartment, 1 appliance door for fridge section

Tall units, height 2 - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm

Carcase height: 2088 mm Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm



Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 internal panel,
- 2 appliance doors

GD145-2



Appliance housing for integrated fridge / freezer aperture height: 1450 mm 1 door,

- 1 shelf,
- 1 internal panel,
- 2 appliance doors,

G145-2

Fillers / Cladding



Filler Carcase material, 2088 mm high, U-shaped seal for

connection to wall, width: 230 mm

HPK20-2 20 cm



Continuous front material, width: 200 mm

HPD20-2 20 cm

Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1780 mm

- 2 appliance doors

GD178-2



Tall units in XL height, height 2 XL - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm 2160 mm Carcase height:

70, 100, 150 oder 200 mm Plinth height:

XL Tall units

573 933 645

XL Pantry unit

- 3 doors, 2 fixed shelves.
- 4 shelves

H*-2X 30/40/50/60 cm



XL Pantry unit

- 2 doors,
- 1 fixed shelf.
- 5 shelves

HDV*-2X 30/40/50/60 cm



XL Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-2X 30/40 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2X 30/40 cm



XL Broom cupboard

- 1 door,
- 1 fixed shelf, 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials.
- 1 system shelf,
- 1 hose rack for vacuum cleaner,
- 2 pegboards



XL Tall unit

- 1 door,
- 1 fixed shelf,
- 1 shelf.
- 1 lug connected door.
- 5 internal pull-outs

HI*-2X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 2 doors, 1 fixed compensation panel,
- 3 shelves

GO-2X



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel,
- 1 drawer,
- 2 shelves

GOS-2X



XL Oven housing aperture height: 590 mm

- 1 door 1 shelf
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-2X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 2 doors

- 1 fixed compensation panel,
- 1 shelf

GMO-2X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door
- 1 fixed compensation panel, 2 pull-outs

GMO2A-2X



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 2 doors,
- 1 lifting door,
- 1 fixed compensation panel,
- 1 shelf



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 1 door.
- 1 lifting door,

1 fixed compensation panel, 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
 - 1 appliance door, 2 shelves

G88-2X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors,
- 1 appliance door, 2 shelves

GD88-2X

573

933

285

357

G88A-2X



XL Appliance housing for integrated fridge aperture height: 880 mm 1 door

- 1 shelf,
- 1 appliance door, 2 pull-outs

XL Appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 flap,
- 1 internal panel,
- 1 appliance door,
- 1 door,
- 1 shelf
- G123-2X



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf.
- 1 internal panel 1 appliance door,
- 1 pull-out

G123A-2X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 1 appliance door for freezer compartment,
- 1 appliance door for fridge section

Tall units in XL height, height 2 XL - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm

Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 internal panel,
- 2 appliance doors

GD145-2X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 shelf,
- 1 internal panel, 2 appliance doors

G145-2X

XL Fillers / Cladding



XL Filler Carcase material, 2160 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-2X 20 cm



XL Front filler Continuous front material, width: 200 mm

HPD20-2X 20 cm

XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1780 mm

1 flap,


2 appliance doors

GD178-2X








Tall units, height 3 – 2230 / 2260 / 2310 / 2360 mm high Carcase depth: 561 mm 2160 mm Carcase height: 70, 100, 150 oder 200 mm Plinth height: Tall units Appliance housing for ovens, microwaves, steam cookers, compact appliances Pantry unit

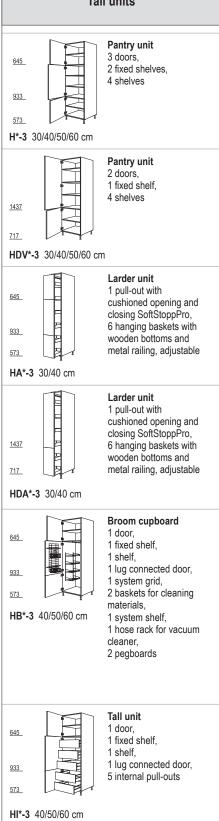

Oven housing aperture height: 590 mm 789 VAR 2 doors, 1 fixed compensation panel, 3 shelves 717 GO-3 Oven housing aperture height: 590 mm 2 doors, 789 VAR 1 fixed compensation panel, 1 drawer, 141 3 shelves 573











Appliance housings with aperture height up to 880 mm

645

Appliance housing

for integrated fridge



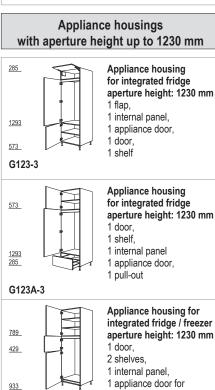

freezer compartment,

1 appliance door for

fridge section

933

G123G-3



Tall units, height 3 - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm

Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm



Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel, 2 appliance doors

GD145-3



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel,

- 2 appliance doors,

G145-3

Fillers / Cladding



Filler

Carcase material, 2160 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-3 20 cm



Continuous front material, width: 200 mm

HPD20-3 20 cm

Appliance housings with aperture height between 1580 - 1940 mm



Appliance housing for fridge / freezer aperture height: 1780 mm

- 2 appliance doors





Tall units in XL height, height 3 XL - 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm 2232 mm Carcase height:

70, 100, 150 oder 200 mm Plinth height:

XL Tall units

645 933 645

XL Pantry unit

- 3 doors, 2 fixed shelves.
- 4 shelves


H*-3X 30/40/50/60 cm



XL Pantry unit

- 2 doors,
- 1 fixed shelf.
- 5 shelves

HDV*-3X 30/40/50/60 cm



XL Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable,
- HA*-3X 30/40 cm





XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable, 1 fixed shelf



645 933 645

XL Broom cupboard

- 1 door,
- 1 fixed shelf, 1 shelf
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials,
- - 1 system shelf, 1 hose rack for vacuum cleaner.
 - 2 pegboards

HB*-3X 40/50/60 cm

XL Tall unit

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door.
- 5 internal pull-outs

HI*-3X 40/50/60 cm

645

933

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel, 4 shelves

GO-3X



XL Oven housing aperture height: 590 mm

- 2 doors,
- 1 fixed compensation panel,
- 1 drawer,
- 3 shelves

GOS-3X



XL Oven housing aperture height: 590 mm

- 1 door 2 shelves
- 1 fixed compensation panel,
- 1 drawer.
- 2 pull-outs

GOS2A-3X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm 2 doors.

- 1 fixed compensation panel,
- 2 shelves

GMO-3X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door.
- 1 shelf.
- 1 fixed compensation panel,
- 1 pull-out

GMOA-3X

GLO-3X



XL Appliance housing for oven and microwave with lifting door

- aperture height: 370 mm aperture height: 590 mm 2 doors.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 shelves



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- door.
- 1 shelf
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door,
- 2 shelves

G88-3X



XL Appliance housing for integrated fridge aperture height: 880 mm 2 doors,

- 1 appliance door,
- 3 shelves

GD88-3X



XL Appliance housing for integrated fridge aperture height: 880 mm 1 door

- 1 shelf,
- 1 appliance door,
- 2 pull-outs

G88A-3X

XL Appliance housings with aperture height up to 1230 mm



- XL Appliance housing for integrated fridge aperture height: 1230 mm
- 1 flap,
- 1 internal panel,
- 1 appliance door,
- 1 door, 1 shelf

573 <u>1293</u> 357

XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 internal panel,
- 1 appliance door,
- 1 pull-out

G123A-3X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 2 shelves,
- 1 internal panel,
- 1 appliance door for
- freezer compartment, 1 appliance door for
- fridge section

Tall units in XL height, height 3 XL - 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm

Carcase height: 2232 mm
Plinth height: 70, 100, 150 oder 200 mm Plinth height:


XL Appliance housings with aperture height up to 1450 mm

<u>501</u> 933

XL Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel,
- 2 appliance doors

GD145-3X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door,
- 1 internal panel,
- 2 appliance doors,

G145-3X

XL Fillers / Cladding



XL Filler Carcase material, 2232 mm high, U-shaped seal for connection to wall, width: 230 mm

HPK20-3X 20 cm



XL Front filler Continuous front material, width: 200 mm

HPD20-3X 20 cm

XL Appliance housings with aperture height between 1580 - 1940 mm



XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm 2 appliance doors

GD194-3X





Wall units 360 mm high

Carcase depth: 350 mm Carcase height: 360 mm

Wall units 360 mm high



Wall unit 1 door

W*-36 45/50/60 cm



Wall unit with flap door opening angle 107°

WK*-36 45/50/60/80/90/100/ 120 cm



WKG*-36 50/60/80/90/100/ 120 cm

Wall unit with framed glass flap door

1 framed glass flap door, clear glass No. 01, opening angle 107°, glass variants against surcharge: no. 02 / 39

No image

Surcharge for different glass choice for glass variants: No. 02 Matt glass

MP-GW No. 39 Black glass

Wall units 360 mm high



WKSQ*-36 50/60/80/90/100/ 120 cm

Wall unit with glass doors Square

1 aluminium framed flap, opening angle 107°, handleless version with wall unit bottom shelf with attached profile strip in stainless steel appearance

Available in:

No. 321 Aluminium framed front in stainless steel appearance with 02 Matt glass No. 308 Aluminium framed front in stainless steel appearance with 035 Grey glass No. 329 Aluminium framed front in Black with 39 Black glass

Open shelf wall unit side depth: 371 mm



WR*-36 30/40/45/50/60/80/90/ 100/120 cm

Fillers



WPK*-36 10/20 cm

20 cm

Filler Carcase material, 360 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm




Front filler Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm



Wall units 576 mm high

Carcase depth: 350 mm Carcase height: 576 mm





Wall unit

1 door, 1 shelf

W*-58

20/30/35/40/45/50/60 cm



W2T-58 60 cm

W*-58 80/90/100/120 cm



Wall unit

2 doors hinged parallel. . 1 shelf

W2TP*-58 80/90/100 cm




Wall unit

1 folding door with slide mechanism, 1 shelf

WFT60-58 60 cm

Wall units 576 mm high



Wall unit, folding/lifting

1 folding/lifting door, 2 original fronts, 1 shelf

WFL*-58 50/60/80/90/100/120 cm



Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation

WM*-58 50/60 cm



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 1 shelf, Planning dimensions:

650 x 650 mm

Wall units 576 mm high



WE60-20-58

WE80-35-58

WE90-45-58

Corner wall unit

1 door, 1 angle filler, 1 shelf

Carcase widths: 600, 782, 882 mm

Planning dimensions (variable): 450 (390 - 500) x ...

WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm

WE90-45: ...900 (890 - 950) mm



Open shelf wall unit 1 fixed shelf.

side depth: 371 mm

WR*-58 15/20/30/40/45/50/60 cm



Wall unit as bottle rack

3 fixed shelves, side depth: 371 mm

WRF15-58

15 cm

Fillers



Filler

Carcase material, 576 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm

WPK*-58 10/20 cm



Front filler


Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm

WPD20-58 20 cm

Wall units, height 1 - 720 mm high

Carcase depth: 350 mm Carcase height: 720 mm

Wall units 720 mm high



Wall unit

1 door, 2 shelves

W*-1

20/25/30/35/40/45/50/55/60 cm



Wall unit 2 doors. 2 shelves

W2T-1 60 cm W*-1 80/90/100 cm



Wall unit 2 doors hinged parallel. 2 shelves

W2TP*-1 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves



WG*-1 45/50/60 cm

60 cm

Wall unit, framed glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-1 90/100 cm Wall unit, framed glass door

2 doors, clear glass No. 01. 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-1 45/50/60 cm Wall unit, segmented glass door 1 door

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

Wall units 720 mm high



WGLS*-1 90/100 cm Wall unit. segmented glass door

2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass



Wall unit, folding/lifting door

1 folding/lifting door, 2 original fronts, 2 shelves

WFL*-1 50/60/80/90/100/120 cm



WFI G*-1 50/60/80/90/100/120 cm Wall unit, folding/lifting door

folding/lifting door, 1 top original front, 1 bottom framed glass front, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



50/60 cm

Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm



60/65/80/90 cm

Corner wall unit 2 doors with 165° hinges, 2 shelves.

hinged side = first door to be opened

Wall units 720 mm high



WE60-20-1 WE80-35-1 WE90-45-1 Corner wall unit

1 door. 1 angle filler, 2 shelves Carcase widths: 600, 782, 882 mm

Planning dimensions (variable): 450 (390 - 500) x ...

WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit

2 fixed shelves, side depth: 371 mm

WR*-1 15/20/30/40/45/50/60 cm




Wall unit as bottle rack 4 fixed shelves, side depth: 371 mm

WRF15-1 15 cm

Fillers



Filler Carcase material, 720 mm high, U-shaped seal for connection to wall width: 100 mm / 200 mm



Front filler Continuous front material, 2 shelves top and bottom,

1 wall unit side panel: 350 mm deep. width: 200 mm

Wall units, height 2 - 792 mm high

Carcase depth: 350 mm Carcase height: 792 mm

Wall units 792 mm high



Wall unit

1 door, 2 shelves

W*-2 20/25/30/35/40/45/50/55/60 cm



Wall unit

2 doors, 2 shelves

W2T*-2 60 cm **W*-2** 80/90/100 cm



Wall unit 2 doors hinged parallel.

W2TP*-2 80/90/100 cm



Wall unit

2 shelves

1 folding door with slide mechanism, 2 shelves

WFT60-2 60 cm

WG*-2

45/50/60 cm



Wall unit, framed glass door 1 door,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-2 90/100 cm

Wall unit, framed glass door 2 doors,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



141 9

WGLS*-2

45/50/60 cm

Wall unit, segmented glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

Wall units 792 mm high



WGLS*-2 90/100 cm Wall unit, segmented glass door 2 doors,


clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image

MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass



Wall unit, folding/lifting door

1 folding/lifting door, 2 original fronts, 2 shelves

WFL*-2 50/60/80/90/100/120 cm



Wall unit, folding/lifting door

1 folding/lifting door, 1 top original front, 1 bottom framed glass front, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



50/60/80/90/100/120 cm

Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation

WM*-2 50/60 cm

WFI G*-2



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm



Corner wall unit 2 doors with 165° hinges, 2 shelves, hinged side = first door to be opened

WE*-2 60/65/80/90 cm

Wall units 792 mm high



WE60-20-2

WE80-35-2

WE90-45-2

Carcase widths: 600, 782, 882 mm Planning dimensions (variable):

Corner wall unit

1 angle filler.

2 shelves

1 door.

450 (390 - 500) x ... WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit

2 fixed shelves, side depth: 371 mm



Wall unit as bottle rack

4 fixed shelves, side depth: 371 mm



Fillers



Filler Carcase material, 792 mm high,

U-shaped seal for connection to wall, width: 100 mm / 200 mm

WPK*-2 10/20 cm



20 cm

Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm

Wall units, height 3 - 864 mm high

Carcase depth: 350 mm Carcase height: 864 mm

Wall units 864 mm high



Wall unit

1 door. 2 shelves

W*-3 20/25/30/35/40/45/50/55/60 cm



Wall unit

2 doors. 2 shelves

W2T*-3 60 cm W*-3 80/90/100 cm



Wall unit 2 doors hinged

parallel. 2 shelves

W2TP*-3 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves

WFT60-3 60 cm



WG*-3 45/50/60 cm Wall unit, framed glass door

1 door, clear glass No. 01. 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-3 90/100 cm

WGLS*-3

45/50/60 cm

Wall unit, framed glass door 2 doors.

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



segmented glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-3 90/100 cm Wall unit, segmented glass door 2 doors,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image

Surcharge for different glass choice

MP-GW

for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 864 mm high



Wall unit for microwave

1 aperture depending on appliance height, 1 door as niche compensation, 1 shelf

WM*-3 50/60 cm



Corner wall unit, diagonal

1 door: 394 mm wide, opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm



Corner wall unit 2 doors with 165° hinges, 2 shelves. hinged side = first door to be opened

Corner wall unit

WF*-3 60/65/80/90 cm

WE60-20-3

WE80-35-3

WE90-45-3



1 door, 1 angle filler,

2 shelves Carcase widths: 600, 782, 882 mm

Planning dimensions (variable): 450 (390 - 500) x ..

WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm



Open shelf wall unit 2 fixed shelves side depth: 371 mm

WR*-3 15/20/30/40/45/50/60 cm



Wall unit as bottle rack 5 fixed shelves, side depth: 371 mm, width: 150 mm

WRF15-3 15 cm

Wall units for cooker hoods

Wall units for cooker hoods



Bridging shelf

Wall unit for slimline cooker hoods

internal panel, metal grids, 80 mm deep, the number of metal grids depends on the built-in dimensions of the cooker hood

WDAF60-58 60 cm

height: 576 mm

WDAF60-1 60 cm

height: 720 mm

WDAF60-2 60 cm

height: 792 mm

WDAF60-3 60 cm

height: 864 mm

Bridging shelf



Bridging shelf in carcase material

laminated on both faces in the same colour, 16 mm thick, 350 mm deep, with edging material on 3 sides, for fitting between wall units or as a window bridging. Price per running 100 mm, invoiced per started 100 mm. Width: 250 - 2580 mm

WZB60

Bridging shelf in carcase material as above, however 600 mm wide

Fillers



Carcase material, 864 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm

10/20 cm



WPD20-3 20 cm

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm


Accessories

Plastic cutlery trays and pull-out organisers




BE* Y 30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray Youno Slate grey, height: 49 mm, fits drawer depth of 500 mm, side depth: 561 mm



BE* -46 Y 45/50/60/80/90/ 100/120 cm


as above, however for drawer depth 400 mm, side depth: 461 mm






BE* D 30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray Depot Non-slip soft touch surface, slate grey, height: 49 mm, fits drawer depth 500 mm, side depth: 561 mm



BE* -46 D 45/50/60/80/90/ 100/120 cm


as above, however for drawer depth 400 mm, side depth: 461 mm








Cutlery trays and pull-out organisers in slate grey ash wood




BE* ES 30/40/45/50/60/80/90/100/120 cm

Slate grey ash wood cutlery tray

Solid ash wood, coated slate grey, height: 49 mm, fits drawer depth 500 mm, side depth: 561 mm



BE* -46 ES 45/50/60/80/90/ 100/120 cm **as above**, however for drawer depth 400 mm, side depth: 461 mm





Slate grey ash wood cutlery tray with knife block

Solid ash wood, coated slate grey, incl. 5 knives, height: 49 mm, fits drawer depth 500 mm, side depth: 561 mm

BE-M 60 ES 60 cm

For drawers with height of 141 mm, not possible in conjunction with construction or spacer shelves KKB*/DBKI*.

Not for use in conjunction with LED interior unit light LSID.

Not possible for drawers SKU* and SKA*.



AO* ES 60/80/90/100/120 cm

Pull-out organiser, slate grey ash

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 8 solid wood partitions in ash for 600 mm width, incl. 16 solid wood partitions in ash for 800/900/1000 mm width, incl. 24 solid wood partitions in ash for 1200 mm width



AOS* ES 60/80/90/100/120 cm

Pull-out organiser, slate grey ash

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 7 solid wood partitions in ash for 600 mm width, incl. 10 solid wood partitions in ash for 800/900/1000 mm width, incl. 13 solid wood partitions in ash for 1200 mm width






Oak cutlery trays and pull-out organisers




BE* E 30/40/45/50/60/80/90/100/120 cm

Oak wooden cutlery tray Solid wood design in oak, height: 49 mm, fits drawer depth of 500 mm, side depth: 561 mm



BE* -46 E 45/50/60/80/90/ 100/120 cm **as above**, however for drawer depth 400 mm, side depth: 461 mm





BE-M 60 E 60 cm

Oak wooden cutlery tray with knife block

Solid oak wood design, incl. 5 knives, height: 49 mm, fits drawer depth 500 mm, side depth: 561 mm

For drawers with height of 141 mm, not possible in conjunction with construction or spacer shelves KKB*/DBKI*.

Not for use in conjunction with LED interior unit light LSID.



AO* E 60/80/90/100/120 cm

Pull-out organiser, oak

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 8 solid wood partitions in oak for 600 mm width, incl. 16 solid wood partitions in oak for 800/900/1000 mm width, incl. 24 solid wood partitions in oak for 1200 mm width



AOS* E 60/80/90/100/120 cm

Pull-out organiser made of oak with solid wood partitions for individualised divisions,

fits pull-out depth 500 mm, side depth: 561 mm, incl. 7 solid wood partitions in oak for 600 mm width, incl. 10 solid wood partitions in oak for 800/900/1000 mm width, incl. 13 solid wood partitions in oak for 1200 mm width





Mounting sets



MONSET 1

Mounting set 1

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut



MONSET 2

Mounting set 2

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut
- 1 hose clip, 16 25 mm
- 1 table socket, triple, sockets model F, with contact protection, white with 1500 mm supply line, 3 x 1.5 mm²

Accessories for sink units



FR* 40/45/50/60/80/90/ 100/120 cm

Moisture protection sheet

aluminium sheet, serrated, for sink base units, cannot be used with front pull-outs. fits only for a side depth of 561 mm

FB90: also fits corner sink units SPUE(D)90-45(-X) and NSPUE90-45(-X)

FB100: also fits corner sink units SPUE(D)100-50(-X) and NSPUE100-50(-X)



40/45/50/60/80/90/ 100/120 cm

Waterproof mat

plastic, slate grey, for sink base units, not for use with front pull-outs, fits only side depth of 561 mm

Not possible in conjunction with hose and cable feed-through SKD or with opening support mechanism Libero AOUI



WSMP* 60/80 cm

Waterproof mat Pro for sink units

Slate grey plastic,

for preventing water damage in sink units not suitable for front pull-outs, only suitable for 561 mm side depth

Upstands



WAP

200/400/500 cm

Length 2000 mm Length 4000 mm

Special length 5000 mm

Plastic upstand

Top section with sealing lips, dimensions: 25 mm high, 25 mm deep, delivered as strand material.

Available in all worktop décors,

also available in:

No. 014 Stainless steel appearance



WAP-7

WAP accessory bag

matches the plastic upstands WAPN consisting of:

- 4 x interior corner 90°
- 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps



WAPN

200/400/500 cm

Length 2000 mm

Length 4000 mm

Special length 5000 mm

Upstands for continuous planning with niche cladding 2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep delivered as strand material.

014 Stainless steel appearance, 010 Black

Bottom profile adds 4 mm to the worktop.



WAPN-Z

WAP accessory bag

matches the plastic upstands WAPN consisting of:

- 4 x interior corner 90° / 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps for WAPN
- 2 x set of end caps for niche cladding

Available in:

014 Stainless steel appearance, 010 Black

Waste collecting systems

Waste collecting systems (fitted on bottom shelf behind hinged door)



Built-in waste collector "Solo"

plastic, slate grey, with full pull-out, capacity: 20 litres, Built-in dimensions: h x w x d = $396 \times 245 \times 427$ mm To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS9430



Built-in waste collector "Tandem 8/8/8"

sorting in 3 bins: volume: 3 x 8 l, h x w x d = 401 x 263 x 437 mm To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10488



Built-in waste collector Tandem 13/13

sorting in 2 bins: volume: $2 \times 13 \text{ I}$, $h \times w \times d = 401 \times 263 \times 437 \text{ mm}$ To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10494



Built-in waste collector "space saving Tandem"

Sorting in 3 bins:
Capacity: 1 x 18 I, 2 x 8.5 I,
1 additional lid for organic waste,
H x W x D = 320 x 336 x 475 mm
To be fitted on site onto bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10484



Built-in waste collector "space saving Tandem S 12/8/8"

sorting in 3 bins: volume: 1 x 12 l, 2 x 8 l, 1 additional bio lid, h x w x d = 347 x 434 x 330 mm

Can be built-in upwards of 500 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10485



Built-in waste collector "space saving Tandem 18/18"

sorting in 2 bins: volume: 2 x 18 l, h x w x d = 336 x 346 x 475 mm To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10487

Waste collecting systems

Waste collecting systems (pull-outs, fitted to the front)



Built-in waste collector "Syncro"

Fully synchronised pull-out rails, with over extension runner, cushioned and covered, metal and plastic parts in slate grey.

h x d: 424 x 400 mm Contents: 2 x 18 litres

Matching sink units: SPUA(D)45(-X) / SPUA45(-M) / NSPUAL45(-X)!

AS3550

AS3551 as above, however, with the following contents:

1 x 18 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)50(-X) / SPUA50(-M) / NSPUAL50(-X)!

AS3552 as above, however, with the following contents:

2 x 28

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!

AS3553 as above, however, with the following contents:

1 x 28 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!



Built-in waste collector "X-Line" X45 M35 Basic

35-litre large container with cover frame with flexible bin liner clamping system, suitable for 35-litre waste bags, Basic drawer as partial pull-out,

h x w x d: 393 x 418 x 368 mm

Matching sink units: SPUA(D)-BW45/SPUA(D)K-BW45(-X) and NSPUA(K)-BW45(-X)!

AS9426

AS9428 Built-in waste collector "X-Line" X50 M35 Basic

as above, but

h x w x d: 393 x 468 x 368 mm

Matching sink units: SPUA(D)-BW50/SPUA(D)K-BW50(-X) and NSPUA(K)-BW50(-X)!



Built-in waste collector "X-Line" X60 M7 Basic

as above, but with additional 15 litre container with lid,

h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

AS9429



Built-in waste collector "X-Line" X60 M5 Basic

as above, but with additional base tray that can be placed on the left or right 8- and 5-litre container with lid,

h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

Waste collecting systems

Waste collecting systems (fitted to hinged door)



Built-in waste collector "Mono" made of metal with removable plastic waste bins, lid and rims are black plastic, right-hand side or left-hand side mounting, no load on door hinges, 15 I capacity. Lid automatically lifts upon opening door. Dimensions: $h \times w \times d = 365 \times 290 \times 304$ mm Please note: Only mount waste collector on side wall with door hinge or on centre stile with corner sink units.

Can be built-in upwards of 400 mm door width.

AS3476



Built-in waste collector "Euro Flexx"


35 I large container with cover frame and bin liner clamping system, fits 1 x 35 l or 2 x 17 l, lid with indentation can be mounted on the right or left $h \times w \times d = 499 \times 370 \times 356 \text{ mm}$


Can be built-in upwards of 450 mm door width.


AS9450

Dimensional drawings | Height grid


Height grid, carcase heights










Height grid, XL carcase heights









Height grid, standard and maxi door dimensions

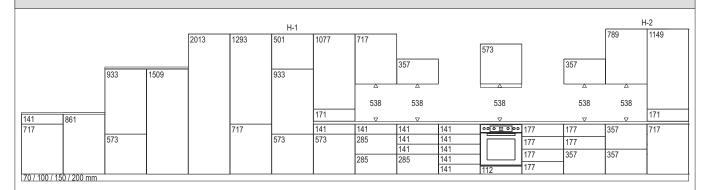




Dimensional drawings | Height grid


Height grid, XL door dimensions, Height 1

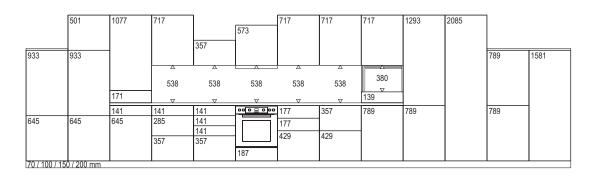


Height grid, XL door dimensions, Height 2

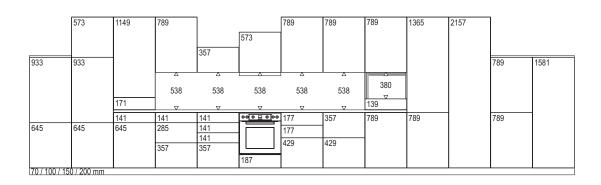

Height grid, XL door dimensions, Height 3

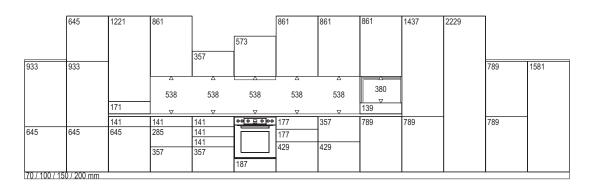

Height grid, tall units



Minimum room heights

A* B*	70 mm	100 mm	150 mm	200 mm
2016 mm	2147 mm	2176 mm	2224 mm	2273 mm
2088 mm	2217 mm	2246 mm	2295 mm	2343 mm
2160 mm	2287 mm	2316 mm	2365 mm	2414 mm
2232 mm	2357 mm	2386 mm	2435 mm	2484 mm

A* = Tall unit height B* = Plinth height